

Features

Perfect Fit Pleated, Venetian and Roller blinds are designed for most uPVC windows, doors and conservatory sides. Features include:

No holes drilled into windows or door

Easy to install and remove:

Frame fits to brackets located between the window seal and glazing.

Easily removed for cleaning.

Stylish and contemporary appearance:

Ideal for conservatory sides and most uPVC windows and doors.

Leaves window sills clutter free.

Enhances light control and privacy:

Blind fits over the glazed area and the Perfect Fit frame covers light gaps.

Options

Brackets: 18, 20, 24 and 30mm

Profile: White (W), Brown (B), Golden Oak (GO)
White (WH), Grey (GY) available for Roller blinds in a Perfect Fit frame in a Velux[®] window

Blinds: **Tab Pleated blinds**
Minimum width: 15cm, maximum width: up to 220cm
Minimum drop: 8cm, maximum drop: up to 150cm
Maximum sq. area: 2.2m²

Tab 25mm Venetian blinds
Minimum width: 25cm, maximum width: 130cm
Minimum drop: 20cm, maximum drop: 200cm
Maximum sq. area: 2.2m²

Up to and including 102cm wide: 1 tab fitted to bottom rail
102.1cm to 130cm wide: 2 tabs fitted to bottom rail

Corded 25mm Venetian blinds
Minimum width: 25cm, maximum width: 400cm
Minimum drop: 8cm, maximum drop: 301cm

Roller blinds
Minimum width: 35cm, maximum width: 140cm
Minimum drop: 15cm, maximum drop: 200cm

Please refer to the Perfect Fit Roller specification sheet for individual fabric specifications.

Ordering

Please supply specification on the order form as shown below

PERFECT FIT TAB PLEATEDS										
Profile	Width	Drop	Fabric Name			Bracket Size (mm)	Profile Colour	Packing Piece (mm)	Qty	E inc. VAT
(P)						18 20 24 30	W B CO	2 6		*

Write dimensions to the nearest 0.1cm
 Write the fabric name and colourway required NB. do not abbreviate
 Circle bracket size required
 Circle profile colour required
 Circle packing piece size required
 Each blind must be individually priced

PERFECT FIT CORDED AND TAB VENETIANS												
Venetian	Venetian Slat (mm)	Tab/ Corded	Width	Drop	Slat Name/Colour	Bracket Size (mm)	Venetian Raise/Lower	Tilt Control	Profile Colour	Packing Piece (mm)	Qty	E inc. VAT
(V)	25	T C				18 20 24 30	L R	L R	W B CO	2 6		*

Circle Venetian type required (T=tab, C=corded)
 Write dimensions to the nearest 0.1cm
 Write the slat colourway required NB. do not abbreviate
 Circle bracket size required
 Circle Venetian control position required
 Circle raise/lower control position (if required)
 Circle profile colour required
 Circle packing piece size required
 Each blind must be individually priced

PERFECT FIT ROLLERS										
Roller	Width	Drop	Fabric Name			Bracket Size (mm)	Profile Colour	Packing Piece (mm)	Qty	E inc. VAT
(R)						18 20 24 30	W B CO	2 6		*

Write dimensions to the nearest 0.1cm
 Write the fabric name and colourway required NB. do not abbreviate
 Circle bracket size required
 Circle profile colour required
 Circle packing piece size required
 Each blind must be individually priced

PERFECT FIT ROLLERS FOR VELUX® WINDOWS									
Roller	Velux® Code	Or if not known	Width	Drop	Fabric Name	Bracket	Profile Colour	Qty	E inc. VAT
(R)			Velux®				WH GY		*
(R)			Velux®				WH GY		*
(R)			Velux®				WH GY		*

Enter Velux® code here
 If code not known enter glazing dimensions to the nearest 0.1cm
 Write the fabric name and colourway required NB. do not abbreviate
 Circle profile colour required
 Each blind must be individually priced

Preparation

Before you begin, ensure there is a 6mm clearance all around the outside of the window beading to allow enough room for the Perfect Fit framework. Also check that the seals of the window frame do not protrude over the glass more than 6mm and that they are compressible. You can then take a bead to bead measurement.

If the seals are not compressible (solid) and do not protrude over the glass by more than 6mm you can then take a seal to seal measurement.



Measuring Instructions


Step 1 - Measure glass size

Measure the width and the drop of your window size accurately. We recommend that you measure in both corners and the middle of your window and use the smallest size taken.



Step 2 - Measure window depth

Measure the depth of the window using a ruler/straight edge and a tape measure. This gives you the measurement from the face of the window frame to the glass (this is normally 18mm, 20mm, 24mm or 30mm) and will determine the size of the window fixing brackets you will use.

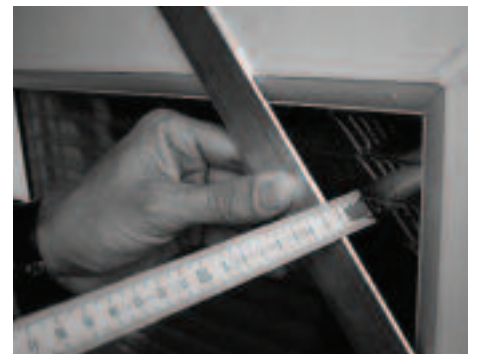

Assembly

There is a simple assembly procedure to follow before installing the Perfect Fit blind.

1. Carefully unwrap the blind components and depending on the blind type, unravel all guides and control cords. The top and bottom parts of the frame will be attached together with cable.

Lay out the blind face down on a clean, even surface.



2. Select the left hand frame component and guide onto the exposed arm of the bottom left corner joint.




3. Slide the frame along the arm until secure. Repeat the process on the top left hand corner joint.

Now follow the same procedure for the right hand frame.



4. Once the frame is complete tighten the securing screws attached to each corner joint.

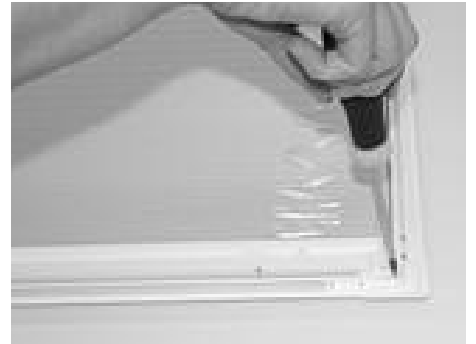

Additional assembly instructions for Tab Venetian

1. When assembling the side rails you will experience some tension.
2. Ensure that the side cords are free from the corner pieces when assembling the frame.
3. Once the blind and frame is assembled you may need to re-tension the blind before fitting.

Tensioning guidelines

Only adjust the tension on the screw which is not attached to the spring.

DO NOT OVERTIGHTEN THE SCREW



Your Perfect Fit blind is now ready to be fitted.



Fitting the Perfect Fit frame to a window frame

Insert window fixing brackets

1. If required, apply lubricant in the form of washing up liquid to the flat base of the window fixing bracket prior to insertion of the bracket between window and rubber seal. For the correct spacing distance of the brackets (85mm), place the measuring card into a corner of the window.
2. Line up the window fixing bracket at the base of the card (or top of the card depending upon which corner of the window you are working) and fit the bracket by pushing it between the glass and the rubber seal on the window.
3. Using the measuring card guarantees a perfect line up for each of the holes in your frame with each of the brackets.

Fit any intermediate brackets accordingly. Clean excess lubricant from window surface prior to fixing frame to brackets.



Insert window fixing brackets into Velux® windows


Fit the bracket into the seal immediately behind the beading. This should provide a 1-2mm gap between the bracket and the glass.

If you fit the bracket up against the glass, the blind will not click into place.

Velux® window spacer blocks

Spacer blocks will be supplied with all Perfect Fit Roller blinds for Velux® windows. However they will only be needed for the following Velux® window types: GGU, GPU and GHL. They allow for clearance of the blind from the window handle.

Fit the spacer blocks into the punched holes on the inside top of the Perfect Fit Roller frame.

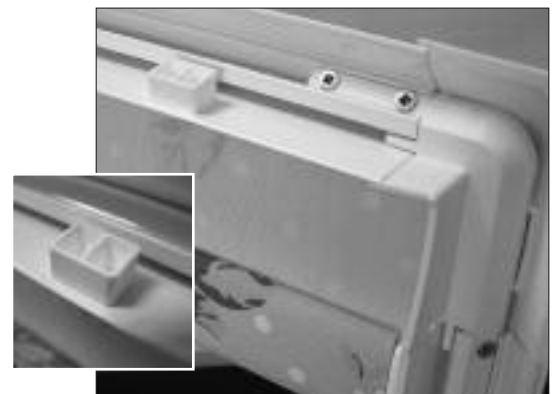

4. Line up the holes in the frame with the window fixing brackets.



5. Firmly press the frame onto each bracket, one side at a time.



6. Your blind is now installed



Pleated blind



Venetian blind



Roller blind

Packing pieces for window handles

Blinds fitted to windows with handles may require packing pieces to be inserted between the framework and the handle.

This is to stop the handle from touching the frame when operated. There are two different lengths available.

1. Lift the handle to an upright position and remove the screw caps.



2. Unscrew the handle from the frame.



3. Place the packing piece(s) in between the handle and the frame.



4. Re-fit the handle.



Perfect Fit Removal

1. To remove the frame from the window, raise the blind to a completely open position.



2. Release the frame from each bracket by inserting a flat headed screw driver into the hole and depress against the lip of the brackets.



3. Remove one side at a time to ensure easier removal.



Operation Guidelines

Perfect Fit Roller blinds

To release the blind, rock the handle backwards. The blind is then free to open and close.



To lock the blind into position, rock the handle forwards.



Perfect Fit Tab Venetian blinds

When raising and lowering, please ensure that the bottom bar moves parallel to the frame to avoid the slats of the blind looking uneven.